



Linear Deflection of Laminated Composite Plates using Dynamic Relaxation Method



Osama Mohammed Elmardi Suleiman ^a

Article history: Received January 6, 2017; Accepted in revised form January 25, 2017; Approved February 16, 2017;
 Available online February 17, 2017

Correspondence Author ^a



Abstract

Dynamic Relaxation (DR) method is presented for the analysis of geometrically linear laterally loaded, rectangular laminated plates. The analysis uses the Mindlin plate theory which accounts for transverse shear deformations. A computer program has been compiled. The convergence and accuracy of the DR solutions of isotropic, orthotropic, and laminated plates for elastic small deflection response are established by comparison with different exact and approximate solutions. The present Dynamic Relaxation (DR) method shows a good agreement with other analytical and numerical methods used in the verification scheme. It was found that: The convergence and accuracy of the DR solution were dependent on several factors which include boundary conditions, mesh size, and type, fictitious densities, damping coefficients, time increment and applied load. Also, the DR small deflection program using uniform meshes can be employed in the analysis of different thicknesses for isotropic, orthotropic, or laminated plates under uniform loads in a fairly good accuracy.

Keywords

*Deflection program;
 Dynamic relaxation method;
 Laminated composite plates;
 Linear deflection;
 Verification scheme*

e-ISSN : 2550-6943, p-ISSN : 2550-6951 © Copyright 2017. The Author. SS Journals Published by Universidad Técnica de Manabí. This is an open-access article under the CC BY-SA 4.0 license (<https://creativecommons.org/licenses/by-sa/4.0/>) All rights reserved.

Contents

Abstract	54
Introduction	56
Research Method and Analysis.....	57
Small Deflection Theory.....	57

^a Department of Mechanical Engineering, Faculty of Engineering and Technology, Nile Valley University, Atbara, Sudan

Equilibrium Equations.....	57
Strain Equations	57
The Constitutive Equations	58
Boundary conditions	58
Dynamic Relaxation Solution of the Plate Equations.....	59
Verification of the Dynamic Relaxation (DR) Method	61
Conclusion	65
Acknowledgements	66
References	66
Biography of Authors	67

في هذه الورقة تم استخدام أسلوب الإسترخاء الديناميكي (DR) للتحليل الخطي للألواح الشرائحية المسلط عليها حمل عرضي موزع بانتظام. يستخدم التحليل نظرية مندلين للألواح (Mindlin plate theory) التي تتضمن تأثير تشوهات القص المستعرض. تم عمل برنامج حاسوب للحل العددي للمعادلات الرئيسية. وقد تم التحقق من تقارب ودقة البرنامج بتحليل طيف واسع من الألواح ذات الانحرافات الصغيرة ومقارنتها بحلول مضبوطة وتقريبية مماثلة. أعطي البرنامج نتائج جيدة موافقة لتلك الحلول.

وجد في هذه الدراسة أن تقارب ودقة الحل باستخدام أسلوب الإسترخاء الديناميكي (DR) يعتمد على عدة عوامل تشمل الشروط الحدية، التقسيمات الشبكية للوح في بعدين، الكثافات الوهمية معاملات الإخماد، الزيادة الزمنية والحمل المسلط. أيضا يمكن استخدام برنامج الإسترخاء الديناميكي للانحرافات الصغيرة للألواح ذات التقسيمات المنتظمة في تحليل ثخانات مختلفة للألواح شرائحية متشابهة الخواص المرنة، متباينة الخواص المرنة في اتجاهين متعامدين وألواح مركبة مفردة أو متعددة الطبقات تحت أحمال منتظمة بدقة مقبولة.

Notations

a, b plate side lengths in x and y directions respectively.

A_{ij} ($i, j = 1, 2, 6$) Plate in plane stiffnesses.

A_{44}, A_{55} Plate transverse shear stiffnesses.

D_{ij} ($i, j = 1, 2, 6$) Plate flexural stiffnesses.

$\epsilon_x^\circ, \epsilon_y^\circ, \epsilon_{xy}^\circ$ Mid - plane direct and shear strains

$\epsilon_{xz}^\circ, \epsilon_{yz}^\circ$ Mid - plane transverse shear strains.

E_1, E_2, G_{12} In - plane elastic longitudinal, transverse and shear modulus.

G_{13}, G_{23} Transverse shear modulus in the $x - z$ and $y - z$ planes respectively.

M_x, M_y, M_{xy} Stress couples.

N_x, N_y, N_{xy} Stress resultants.

\bar{q} Dimensionless transverse pressure.

Q_x, Q_y Transverse shear resultants.

u, v In - plane displacements.

w Deflections

\bar{w} Dimensionless deflections.

x, y, z Cartesian co - ordinates.

δt Time increment.

ϕ, ψ Rotations of the normal to the plate mid - plane.

ν_{xy} Poisson's ratio.

$l_u, l_v, l_w, l_\phi, l_\psi$ In plane, out of plane and rotational fictitious densities.

$\chi_x^\circ, \chi_y^\circ, \chi_{xy}^\circ$ Curvature and twist components of plate mid – plane.

$\bar{\sigma}_x, \bar{\sigma}_y$ Dimensionless direct stresses in the x and y directions respectively

$\bar{\sigma}_{xy}, \bar{\sigma}_{xz}, \bar{\sigma}_{yz}$ Dimensionless in plane and out of plane shear stresses.

Introduction

There are many situations in engineering applications where no single material will be suitable to meet a particular design requirement. However, two materials in combination may possess the desired properties and provide a feasible solution to the materials selection problem. A composite can be defined as a material that is composed of two or more distinct phases. It is usually a reinforced material that supported in a compatible matrix, assembled in prescribed amounts to giving specific physical, mechanical and chemical properties.

Many composites used today are at the leading edge of materials technology, with their performance and cost appropriate to overwhelming applications such as that in space industries. Nevertheless, heterogeneous materials combining the best aspect of dissimilar constituents have been used by nature for millions of years ago. Ancient societies, imitating nature, used this approach as well: The book of exodus explains the usage of straw to reinforce mud in the brick making without which the bricks would have almost no strength. Here in Sudan, the population from ancient ages dated back to Meroe civilization, and up to now used zibala (i.e. animal dung) mixed with mud as a strong building material.

Composites possess two desirable features: the first one is their high strength to weight ratio, and the second is their properties that can be tailored through the variation of the fiber orientation and the stacking sequence which give the designer a wide choice of a suitable composite material. The incorporation of high strength, high modulus and low-density fibers in a low strength and a low modulus matrix material result in a structural composite material which owns a high strength to weight ratio. Thus, the potential of a composite structure for use in aerospace, under – water, and automotive applications has stimulated considerable research activities in the theoretical prediction of the behavior of these materials. Usually, a composite structure consists of many layers bonded on top of one another to form a high strength and rigid laminated composite plate. Each lamina is fiber reinforced along a single direction, with adjacent layers usually having different fiber orientations. For these reasons, composites are continuing to replace other materials used in structures such as steels, Aluminum alloys... etc. In fact, composites are classified as the potential structural materials of the future as their cost continues to decrease due to the continuous improvements in production techniques and expanding rate of sales.

Three – dimensional theories of laminated plates in which each layer is treated as homogeneous anisotropic medium (Reddy [12]) are intractable as the number of layers becomes moderately large. Thus, Reddy [12] concluded that a simple two-dimensional theory of plates that accurately describes the global behavior of laminated plates seems to be a compromise between accuracy and ease of analysis. Numerical results obtained using refined finite element analysis (D.J. vuksanovic [13], and [14]) and their comparison with exact three-dimensional analysis pointed out that the higher order theory provides results which are accurate and acceptable for all ranges of thickness and modular ratio.

Putchu and Reddy [15] classified the two-dimensional analyses of laminated composite plates into two categories: (1) the classical lamination theory, and (2) shear deformation theories (including first and higher order theories). In both theories the laminates are assumed in a state of plane stress, the individual lamina is linearly elastic, and there is perfect bonding between layers. The classical laminated plate theory (CLPT), which is an extension of the classical plate theory (CPT) applied to laminated plates was the first theory formulated for the analysis of laminated plates by Reissner and Stavsky [16] in 1961, in which they utilized the Kirchhoff – love assumption that normals to the middle surface before deformation remain straight and normal to

the middle surface after deformation, but it is not adequate for the flexural analysis of moderately thick laminates. However, it gives reasonably accurate results for many engineering problems especially those related to thin composite plates, as proved by Srinivas and Rao [5], Reissner and Stavsky [16], Hui – Shen Shen [17], and Ji – Fan He, and Shuang – Wang Zheng [18]. This theory ignores the transverse shear stress components and models a laminate as an equivalent single layer. The high values of modular ratios classify classical laminate theory as inadequate for the analysis of composite plates as verified by Turvey and Osman [1], [4], [19], Reddy [12], Pagano [20], and Taner Timarci and Metin Aydogdu [21].

The theory used in the present work comes under the class of displacement based theories which are classified according to Phan and Reddy [22]. In this theory, which is called first order shear deformation theory (FSDT), the transverse planes, which are originally normal and straight to the middle plane of the plate, are assumed to remain straight but not necessarily normal after deformation, and consequently shear correction factors are employed in this theory to adjust the transverse shear stress, which is constant through thickness. Numerous studies involving the application of the first order theory to bending and buckling analyses can be found in the works of Reddy [6], Reddy and Chao [23] Prabhu Madabhushi – Raman and Julio F. Davalo [24], and J. Wang, K.M. Liew, M.J. Tan, S. Rajendran [25].

Research Method and Analysis

Small Deflection Theory

The equilibrium, strain, constitutive equations and boundary conditions are introduced below without derivation.

Equilibrium Equations

$$\begin{aligned} \frac{\partial N_x}{\partial x} + \frac{\partial N_{xy}}{\partial y} &= 0 \\ \frac{\partial N_{xy}}{\partial x} + \frac{\partial N_y}{\partial y} &= 0 \\ \frac{\partial Q_x}{\partial x} + \frac{\partial Q_y}{\partial y} + q &= 0 \\ \frac{\partial M_x}{\partial x} + \frac{\partial M_{xy}}{\partial y} - Q_x &= 0 \\ \frac{\partial M_{xy}}{\partial x} + \frac{\partial M_y}{\partial y} - Q_y &= 0 \end{aligned} \quad (1)$$

Strain Equations

The small deflection strains of the mid – plane of the plate are as given below:

$$\begin{aligned}\varepsilon_x^\circ &= \frac{\partial u^\circ}{\partial x} + z \frac{\partial \phi}{\partial x} \\ \varepsilon_y^\circ &= \frac{\partial v^\circ}{\partial y} + z \frac{\partial \psi}{\partial y} \\ \varepsilon_{xy}^\circ &= \frac{\partial u^\circ}{\partial y} + \frac{\partial v^\circ}{\partial x} + z \left\{ \frac{\partial \phi}{\partial y} + \frac{\partial \psi}{\partial x} \right\}\end{aligned}\quad (2)$$

$$\varepsilon_{xz}^\circ = \frac{\partial w}{\partial y} + \psi$$

$$\varepsilon_{yz}^\circ = \frac{\partial w}{\partial x} + \phi$$

The Constitutive Equations

The laminate constitutive equations can be represented in the following form:

$$\begin{aligned}\begin{Bmatrix} N_i \\ M_i \end{Bmatrix} &= \begin{bmatrix} A_{ij} & B_{ij} \\ B_{ij} & D_{ij} \end{bmatrix} \begin{Bmatrix} \varepsilon_j^\circ \\ \chi_j^\circ \end{Bmatrix} \\ \begin{Bmatrix} Q_y \\ Q_x \end{Bmatrix} &= \begin{bmatrix} A_{44} & A_{45} \\ A_{45} & A_{55} \end{bmatrix} \begin{Bmatrix} \varepsilon_{yz}^\circ \\ \varepsilon_{xz}^\circ \end{Bmatrix}\end{aligned}\quad (3)$$

Where N_i denotes, N_y and N_{xy} and M_i denotes, M_y and M_{xy} . A_{ij} , B_{ij} and D_{ij} , ($i, j = 1, 2, 6$) are respectively the membrane rigidities, coupling rigidities and flexural rigidities of the plate.

χ_j° Denotes $\frac{\partial \phi}{\partial x}$, $\frac{\partial \psi}{\partial y}$ and $\frac{\partial \phi}{\partial y} + \frac{\partial \psi}{\partial x}$. A_{44} , A_{45} and A_{55} denote the stiffness coefficients, and are calculated as follows:

$$A_{ij} = \sum_{k=1}^n K_i K_j \int_{z_k}^{z_{k+1}} c_{ij} dz, (i, j = 4, 5)$$

Where C_{ij} are the stiffness of a lamina referred to the plate principal axes and, K_j are the shear correction factors?

Boundary conditions

All of the analyses described in this paper have been undertaken to assume the plates to be subjected to identical support conditions in the flexural and extensional senses along all edges. The three sets of edge conditions used here are designated as SS1, SS2, and SS3 and are shown in Figure (1) below.

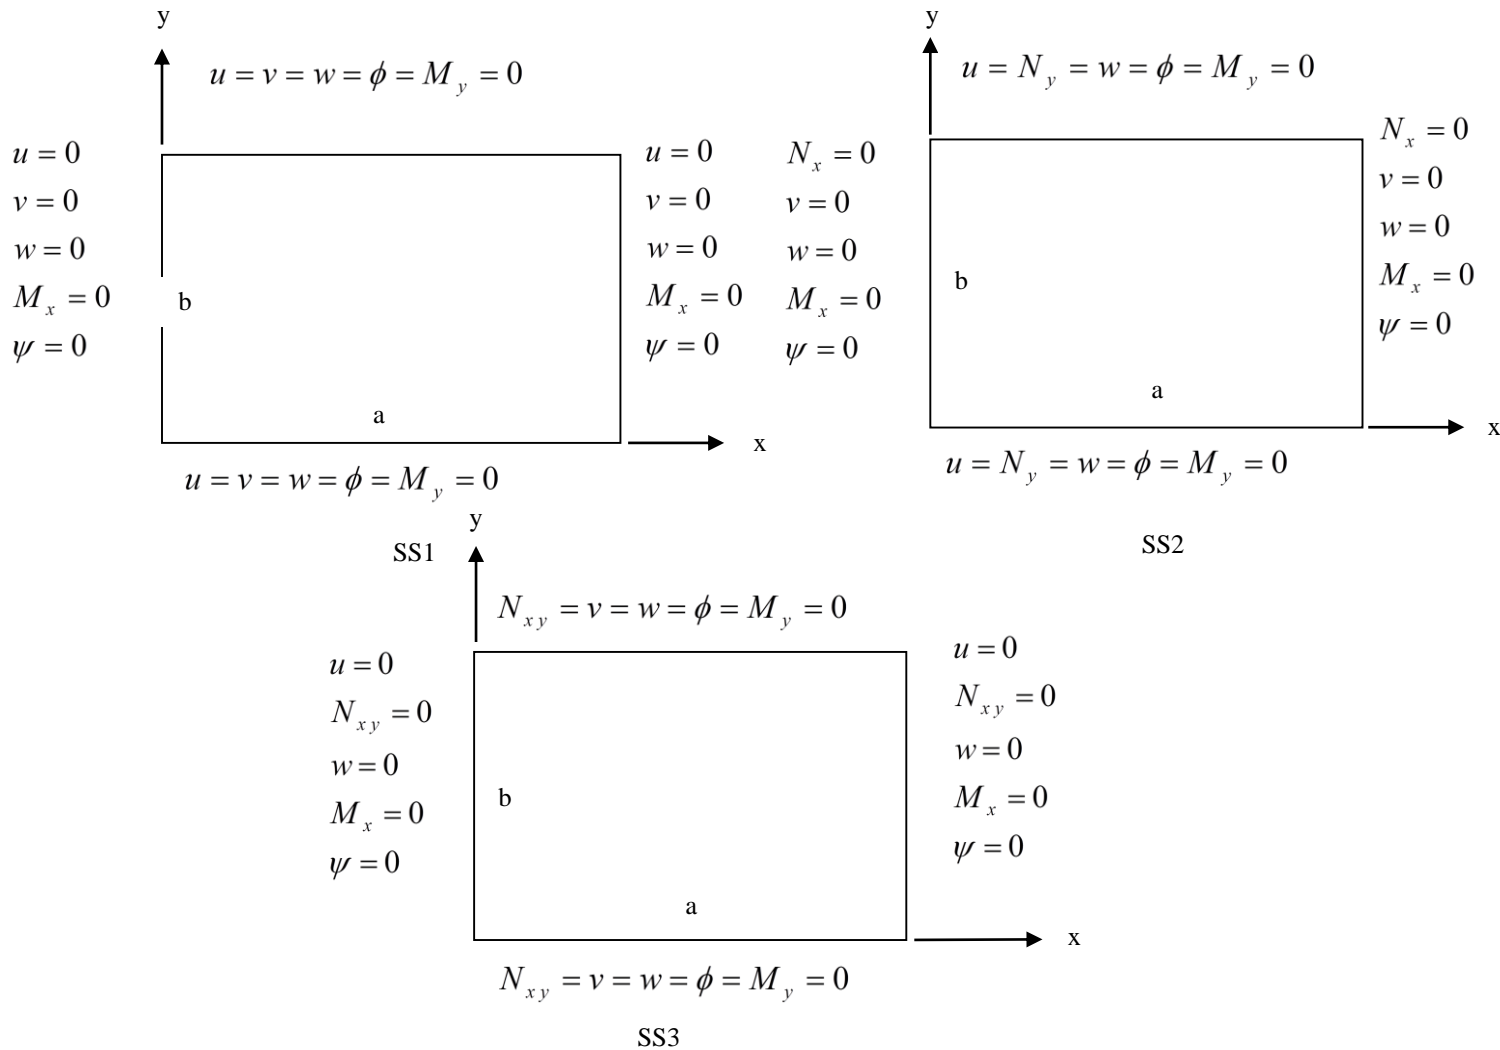


Fig. (1) Simply supported boundary conditions

Dynamic Relaxation Solution of the Plate Equations

In the present work, a numerical method is known as Dynamic Relaxation (DR) coupled with finite differences is used. The DR method was first proposed in the 1960s and then passed through a series of studies to verify its validity by Turvey and Osman Refs. [1], [4] and [19] and Rushton [9], Cassel and Hobbs [10], and Day [11]. In this method, the equations of equilibrium are converted to dynamic equations by adding damping and inertia terms. These are then expressed in finite difference form and the solution is obtained through iterations.

Numerical techniques other than the DR include finite element method, which is widely used in several studies i.e. of Damodar R. Ambur et al [26], Ying Qing Huang et al [27], Onsy L. Roufaeil et al [3]... etc. In a comparison between the DR and the finite element method, Aalami [28] found that the computer time required for finite element method is eight times greater than for DR analysis, whereas the storage capacity for finite element analysis is ten times or more than that for DR analysis. This fact is supported by Putcha and Reddy [15] who they noted that some of the finite element formulation requires large storage capacity and computer time. Hence due to fewer

computations and computer time involved in the present study, the DR method is considered more suitable than the finite element method.

The plate equations are written in dimensionless forms. Damping and inertia terms are added to Eqns. (1). Then the following approximations are introduced for the velocity and acceleration terms:

$$\frac{\partial \alpha}{\partial t} = \frac{1}{2} \left[\frac{\partial \alpha^a}{\partial t} + \frac{\partial \alpha^b}{\partial t} \right] \quad (4)$$

$$\frac{\partial^2 \alpha}{\partial t^2} = \left(\frac{\partial \alpha^a}{\partial t} - \frac{\partial \alpha^b}{\partial t} \right) / \delta t$$

In which $\alpha \equiv u, v, w, \phi, \psi$. Hence Eqns (1) becomes :

$$\frac{\partial u^a}{\partial t} = \frac{1}{1+k_u^*} \left[(1-k_u^*) \frac{\partial u^b}{\partial t} + \frac{\delta t}{\ell_u} \left(\frac{\partial N_x}{\partial x} + \frac{\partial N_{xy}}{\partial y} \right) \right]$$

$$\frac{\partial v^a}{\partial t} = \frac{1}{1+k_v^*} \left[(1-k_v^*) \frac{\partial v^b}{\partial t} + \frac{\delta t}{\ell_v} \left(\frac{\partial N_{xy}}{\partial x} + \frac{\partial N_y}{\partial y} \right) \right]$$

$$\frac{\partial w^a}{\partial t} = \frac{1}{1+k_w^*} \left[(1-k_w^*) \frac{\partial w^b}{\partial t} + \frac{\delta t}{\ell_w} \left(\frac{\partial Q_x}{\partial x} + \frac{\partial Q_y}{\partial y} + q \right) \right] \quad (5)$$

$$\frac{\partial \phi^a}{\partial t} = \frac{1}{1+k_\phi^*} \left[(1-k_\phi^*) \frac{\partial \phi^b}{\partial t} + \frac{\delta t}{\ell_\phi} \left(\frac{\partial M_x}{\partial x} + \frac{\partial M_{xy}}{\partial y} - Q_x \right) \right]$$

$$\frac{\partial \psi^a}{\partial t} = \frac{1}{1+k_\psi^*} \left[(1-k_\psi^*) \frac{\partial \psi^b}{\partial t} + \frac{\delta t}{\ell_\psi} \left(\frac{\partial M_{xy}}{\partial x} + \frac{\partial M_y}{\partial y} - Q_y \right) \right]$$

In Eqns. (4) and (5) the superscripts a and b refer respectively to the values of velocities after and before the time step δt , and $k_\alpha^* = \frac{1}{2} k_\alpha \delta t \ell_\alpha^{-1}$. The displacements at the end of each time increment, δt , are evaluated using the following simple integration procedure:

$$\alpha^a = \alpha^b + \delta t \frac{\partial \alpha^b}{\partial t} \quad (6)$$

The complete equation system is represented by means. (5), (6), (2) and (3). The DR algorithm operates on these equations is as follows:

- Step 1: set initial conditions (usually all variables are zero).
- Step 2: compute velocities from eqns. (5).
- Step 3: compute displacements from eqn. (6).
- Step 4: Apply displacement boundary conditions.
- Step 5: compute strains from eqns. (2).
- Step 6: compute stress resultants, etc from eqns. (3).
- Step 7: Apply stress resultants ... etc, boundary conditions.
- Step 8: check if velocities are acceptably small (say $< 10^{-6}$).
- Step 9: If Step 8 is satisfied print out results, otherwise repeat steps (2 - 8).

Verification of the Dynamic Relaxation (DR) Method

The present DR results are compared with similar results generated by other DR and/or alternative techniques including approximate analytical and exact solutions so as to validate the DR program. In the following discussion, a wide range of small deflections are dealt with including isotropic, orthotropic, and laminated plates subjected to static uniformly distributed loading scheme.

Table (1) shows the variations in the central deflections of a moderately thick isotropic plate ($h/a = 0.1$) with simply supported condition (SS1). These results suggest that a 5×5 mesh over one-quarter of the plate is quite enough for the present work (i.e. less than 0.3% error compared to the finest mesh available). In the table (2) the comparison of the present DR deflections and stresses with that generated by Turvey and Osman [1] and Reddy [2] is presented for a uniformly loaded plate of thin (i.e. $h/a = 0.01$), moderately thick (i.e. $h/a = 0.1$), and thick laminates (i.e. $h/a = 0.2$) using simply supported condition (SS1). The present DR results of central deflections and stresses showed good agreement with the other results even though the plate is square or rectangle. Another comparison analysis for small deformations of thin and moderately thick square simply supported isotropic plates (SS1) between the present DR method, and Roufaeil [3] two and three node strip method is shown in the table (3). Again, these results provide further confirmation that a DR analysis based on a 5×5 quarter – plate mesh produces results of acceptable accuracy.

In the following analyses, several orthotropic materials were employed; their properties are given in table (4). Exact FSDT solutions are available for plates simply supported on all four edges (SS2). By imposing only a small load on the plate, the DR program may be made to simulate these small deflections. In the table (5), the computations were made for uniform loads and for thickness/side ratios ranging from 0.2 to 0.01 of square simply supported in – plane free plates made of material I with ($\bar{q} = 1.0$). In this case, the central deflections of the present DR method are close to those of Turvey and Osman [4], and Reddy [2]. Another small deflection analysis is shown in table (6), and it was made for uniformly loaded plates with simply supported in – plane fixed condition (SS1) of material II and subjected to uniform loading ($\bar{q} = 1.0$). In this analysis, the four sets of results are the same for the central deflections and stresses at the upper and lower surfaces of the plate and also the same for the mid – plane stresses. Nevertheless, the exact solution of Srinivas and Rao [5] is not in a good agreement with the others as far as stresses are concerned. These differences may be attributed to the exact solution theory adopted in Ref. [5].

Most of the published literature on laminated plates are devoted to linear analysis and in particular to the development of higher order shear deformation theories. Comparatively, there are few studies on the nonlinear behavior of laminated plates and even fewer are those which include shear deformations. The elastic properties of the material used in the analyses are given in table (4). The shear correction factors are $k_4^2 = k_5^2 = 5/6$, unless otherwise stated.

In the table (7) which shows a comparison between the present DR method and finite element results of Ref. [6] for a simply supported condition (SS3) plate. There are four antisymmetric angle-ply laminates of material III which are subjected to a small uniform load ($\bar{q} = 1.0$). The central deflections and stresses are recorded for different thickness ratios including thick, moderately thick, and thin laminates. These results are compared with Reddy's finite element results [6] and are found in a good agreement despite the different theory adopted in the latter case.

Another comparison analysis of central deflections between the present DR method, Zenkour et al [7] using third-order shear deformation theory and Librescu and Khdeir [8] which are made of material IV are illustrated in table (8). The three results showed a good agreement especially as the length of thickness ratio increases.

Table 1 DR solution convergence results for a simply supported (SS1) square plate subjected to uniform pressure $\left(\bar{q} = 1.0, h/a = 0.1 \text{ and } \nu = 0.3\right)$

Mesh size	\bar{w}_c
2 × 2	0.04437
3 × 3	0.04592
4 × 4	0.04601
5 × 5	0.04627
6 × 6	0.04629
7 × 7	0.04638
8 × 8	0.04640

Table 2. Comparison of present DR, Turvey, and Osman [1], and exact values of Reddy [2] small deflection results for uniformly loaded simply supported (SS1) square and rectangular plates of various thickness ratios $\left(\bar{q} = 1.0, \nu = 0.3\right)$

a/b	h/a	S	\bar{w}_c	$\bar{\sigma}_x(1)$	$\bar{\sigma}_y(1)$	$\bar{\sigma}_{xy}(2)$	$\bar{\sigma}_{xz}(3)$	$\bar{\sigma}_{yz}(4)$
1	0.20	1	0.0529	0.2879	0.2879	-0.2035	0.3983	0.3983
		2	0.0529	0.2879	0.2879	-0.2035	0.3984	0.3984
		3	0.0536	0.2873	0.2873	-0.1946	0.3928	0.3928
	0.10	1	0.0463	0.2866	0.2866	-0.2038	0.3983	0.3960
		2	0.0463	0.2865	0.2865	-0.2038	0.3990	0.3990
		3	0.0467	0.2873	0.2873	-0.1946	0.3928	0.3928
	0.01	1	0.0440	0.2853	0.2853	-0.2033	0.3960	0.3960
		2	0.0441	0.2860	0.2860	-0.2039	0.3990	0.3990
		3	0.0444	0.2873	0.2873	-0.1946	0.3928	0.3928
2	0.20	1	0.1204	0.2825	0.6165	-0.2952	0.4230	0.5400
		2	0.1216	0.2840	0.6225	-0.2829	0.4341	0.5410
		3	0.1248	0.2779	0.6100	-0.2769	0.4192	0.5451
	0.10	1	0.1111	0.2819	0.6148	-0.2964	0.4200	0.5412
		2	0.1122	0.2838	0.6209	-0.2843	0.4358	0.5447
		3	0.1142	0.2779	0.6100	-0.2769	0.4192	0.5451
	0.01	1	0.1080	0.2823	0.6141	-0.2970	0.4200	0.5400
		2	0.1109	0.2842	0.6212	-0.2857	0.4377	0.5472
		3	0.1106	0.2779	0.6100	-0.2769	0.4192	0.5451

S (1): present DR results

S (2): DR results of Ref. [1]

S (3): Exact results of Ref. [2]

$$(1)x = \frac{1}{2}a, y = \frac{1}{2}b, z = \frac{1}{2}h; (2)x = y = 0, z = \frac{1}{2}h; (3)x = 0, y = \frac{1}{2}b, z = 0; (4)x = \frac{1}{2}a, y = z = 0$$

Table 3. Dimensionless central deflection of a square simply supported isotropic plate (SS1)
 $(\bar{q} = 1.0, \nu = 0.3, k^2 = 0.0.833)$

a/h	Present DR Results	3 - node strip Ref. [31]	2 - node strip Ref. [31]
100	0.00403	0.00406	0.00406
10	0.00424	0.00427	0.00426

Table 4. Material properties used in the orthotropic and laminated plate Comparison analysis

Material	E_1/E_2	G_{12}/E_2	G_{13}/E_2	G_{23}/E_2	ν_{12}	$SCF(k_4^2 = k_5^2)$
I	25.0	0.5	0.5	0.2	0.25	5/6
II	1.904	0.558	0.339	0.566	0.44	5/6
III	40.0	0.5	0.5	0.5	0.25	5/6
IV	12.308	0.526	0.526	0.335	0.24	5/6

Table 5. Comparison of present DR, Turvey, and Osman [4], and Ref [2] center deflections of a simply supported (SS2) square orthotropic plate made of material I for different thickness ratios when subjected to uniform loading ($\bar{q} = 1.0$).

Thickness ratio h/a	Uniform Loading		
	$\bar{w}_c (DR)$ present	$\bar{w}_c (DR)$ Ref. [4]	$\bar{w}_c (exact)$ Ref. [2]
0.2	0.017914	0.017912	0.018159
0.1	0.009444	0.009441	0.009519
0.08	0.008393	0.008385	0.008442
0.05	0.007245	0.007230	0.007262
0.02	0.006617	0.006602	0.006620
0.01	0.006512	0.006512	0.006528

Table 6. Comparison of present DR, Ref. [4], Ref. [2], and exact solutions Ref [5] for a uniformly loaded simply supported (SS1) orthotropic plate made of material II when subjected to uniform loading ($\bar{q} = 1.0$)

b/a	h/a	S	\bar{w}_c	$\bar{\sigma}_x (1)$	$\bar{\sigma}_{xz} (2)$
1	0.05	1	0.0306	0.3563	0.4387
		2	0.0306	0.3562	0.4410
		3	0.0308	0.3598	0.4351
		4	0.0308	0.3608	0.5437
	0.10	1	0.0323	0.3533	0.4393
		2	0.0323	0.3534	0.4395
		3	0.0326	0.3562	0.4338
		4	0.0325	0.3602	0.5341
	0.14	1	0.0344	0.3498	0.4367
		2	0.0344	0.3498	0.4374
		3	0.0347	0.3516	0.5328

Suleiman, O. M. E. (2017). Linear deflection of laminated composite plates using dynamic relaxation method. *International Journal of Physical Sciences and Engineering*, 1(1), 54-67.
<https://doi.org/10.21744/ijpse.v1i1.11>

		4	0.0346	0.3596	0.5223
2	0.05	1	0.0629	0.6569	0.6506
		2	0.0629	0.6568	0.5637
		3	0.0636	0.6550	0.5600
		4	0.0636	0.6567	0.7024
	0.10	1	0.0657	0.6566	0.5623
		2	0.0657	0.6566	0.5628
		3	0.0665	0.6538	0.5599
		4	0.0664	0.6598	0.6927
	0.14	1	0.0692	0.6564	0.5613
		2	0.0692	0.6564	0.5613
		3	0.0703	0.6521	0.5597
		4	0.0701	0.6637	0.6829

S (1): present DR results

S (2): DR results of Ref [4]

S (3): Finite element solution Ref [2]

S (4): Exact solution Ref [5]

$$(1)x = \frac{1}{2}a, y = \frac{1}{2}b, z = \frac{1}{2}h; (2)x = 0, y = \frac{1}{2}b, z = 0$$

Table 7. Comparison of present DR, and Reddy finite element results Ref. [6] for $[45^\circ / -45^\circ / 45^\circ / -45^\circ]$ simply supported (SS3) square laminate made of material

III and subjected to uniform loads and for different thickness ratios ($\bar{q} = 1.0$)

h/a	S	$\bar{w}_c \times 10^3$	$\bar{\sigma}_x(1)$
0.20	1	9.0809	0.2022
	2	9.0000	0.1951
0.10	1	4.3769	0.2062
	2	4.2000	0.1949
0.05	1	3.2007	0.2081
	2	3.0000	0.1938
0.04	1	3.0574	0.2090
	2	2.9000	0.1933
0.02	1	2.8371	0.2063
	2	2.8000	0.1912

S (1): present DR results.

S (2): Reddy [6] as reading from the graph. (1) $x = y = \frac{1}{2}a, z = \frac{1}{2}h$

Table 8. Non - dimensionalized deflections in three layers cross - ply $[0^\circ / 90^\circ / 0^\circ]$ simply supported (SS1) square laminates of material IV under uniform load ($\bar{q} = 1.0$)

a/h	S	\bar{w}_c
2	1	0.0693
	2	0.0726
	3	0.0716

5	1	0.0224
	2	0.0232
	3	0.0235
10	1	0.0147
	2	0.0150
	3	0.0151
20	1	0.0127
	2	0.0128
	3	0.0128

S (1): present DR results in linear analysis

S (2): Librescu L and Khdeir A.A [8]

S (3): A.M. Zenkour, and M.E.Fares [7] results.

Conclusion

A Dynamic relaxation (DR) program based on finite differences has been developed for small deflection analysis of rectangular laminated plates using first-order shear deformation theory (FSDT). The displacements are assumed linear through the thickness of the plate. A series of new results for uniformly loaded thin, moderately thick, and thick plates with simply supported edges have been presented. Finally, a series of numerical comparisons have been undertaken to demonstrate the accuracy of the DR program. These comparisons show the following:-

1. The convergence of the DR solution depends on several factors including boundary conditions, mesh size, fictitious densities and load.
2. The type of mesh used (i.e. uniform or graded mesh) may be responsible for the considerable differences in the mid – side and corner stress resultants.
3. For simply supported (SS1) edge conditions, all the comparison results confirmed that deflection depends on the direction of the applied load or the arrangement of the layers.
4. The DR small deflection program using uniform finite difference meshes can be employed with less accuracy in the analysis of moderately thick and flat isotropic, orthotropic or laminated plates under uniform loads.
5. Time increment is a very important factor for speeding convergence and controlling numerical computations. When the increment is too small, the convergence becomes tediously slow, and when it is too large, the solution becomes unstable. The proper time increment in the present study is taken as 0.8 for all boundary conditions.
6. The optimum damping coefficient is that which produces critical motion. When the damping coefficients are large, the motion is over – damped and the convergence becomes very slow. And when the coefficients are small, the motion is under – damped and can cause numerical instability. Therefore, the damping coefficients must be selected carefully to eliminate under – damping and over – damping.
7. Finer meshes reduce the discretization errors but increase the round – off errors due to a large number of calculations involved.

Acknowledgement

The author thank to the editor for publishing the paper with free and good review.

References

1. Aalami B., 'large deflection of elastic plates under patch loading', Journal of structural division, ASCE, vol.98, No. ST 11, (1972), pp. (2567 – 2586).
2. Arauz, W. M. S., Cedeño, G. I., Chávez, S. S., Pérez, A. V., & Gámez, M. R. (2017). Microgrid With a 3.4 kWp Photovoltaic System in the Universidad Técnica de Manabí. International Journal of Physical Sciences and Engineering (IJPSE), 1(2), 11-20.
3. Cassel A.C. and Hobbs R.E., 'Numerical stability of dynamic Relaxation methods in engineering, "vol. 35, No. 4, (1966), pp. (1407 –1410).
4. Castillo, G. A. L., Álava, L. A. C., Fernández, M. C., & Llanes, M. V. (2017). Roadmap for the Introduction of Smart Grids in Ecuador. International Journal of Physical Sciences and Engineering (IJPSE), 1(2), 1-10.
5. Damodar R. Ambur, Navin Jaunkey, Mark Hilburger, Carlos G. Davila, 'Regressive failure analysis of compression loaded composite curved panels with and without cutouts', composite structures, vol. 65,(2004), pp.(143 – 155).
6. Day A.S., "An Introduction to Dynamic Relaxation", the engineer, vol. 219, No. 5688, (1965), pp. (218 – 221).
7. Hui – Shen Shen, 'large deflection of composite laminated plates under transverse and in-plane loads and resting on elastic foundation', computers structures, vol. 45, (1999), pp. (115 – 123).
8. Jain, P., Billaiya, R., & Malaiya, S. (2017). A Correlational Analysis of Academic Stress in Adolescents in Respect of Socio-Economic Status. International Journal of Physical Sciences and Engineering (IJPSE), 1(1), 68-71.
9. Ji – Fan He, Shuang – Wang Zhang, 'Symmetric deformation analysis of symmetrically laminated plates including transverse shear and normal effects', computers structures, vol. 45, (1999), pp.(205 – 226).
10. Librescu L.khdeir A.A. "Analysis of symmetric cross – ply laminated Elastic plates using a higher – order theory. Part I – stress and Displacement", composite structure, vol. 9, (1988), pp. (189 – 213).
11. Ogunsiji, A. S., & Ladanu, W. K. (2017). A Theoretical Study of Performance Measures in the Strategic and Corporate Entrepreneurships of Firms. International Journal of Physical Sciences and Engineering (IJPSE), 1(1), 72-80.
12. Omer, A. M. (2017). Sustainable Development and Environmentally Friendly Energy Systems. International Journal of Physical Sciences and Engineering (IJPSE), 1(1), 1-39.
13. Onsy L.Roufaeil, Thanh Tran – cong, "Finite strip elements for laminated composite plates with transverse shear strain discontinuities", composite structures, vol.56, (2002), pp. (249 – 258).
14. Pagano N.J, 'Exact solutions for rectangular bi-directional composites and sandwich plates', Journal of composite materials, vol.4, (1970), pp. 20 – 34.
15. Phan N.D. and Reddy J.N., 'Analysis of laminated composite plate using higher order shear deformation theory', international Journal of numerical method in engineering, vol.21, (1985), pp. (2201 – 2219).
16. Prabha Madabhusi – Raman, and Julio F. Davalos, 'static shear correction factor for laminated rectangular beams', composites: part B, 27B, (1996), pp. (285 – 293).
17. Putcha N.S. and Reddy J.N., 'A refined mixed shear flexible finite element for the non-linear analysis of laminated plates', computers and structures, vol. 22, No.4, (1986), pp. (529 – 538).
18. Reddy J.N. 'A simple higher-order theory for laminated composite plates', Journal of Applied Mechanics, vol. 51, No 745, (1984), pp. (745-752).
19. Reddy J.N. and Chao W.C., 'Non-linear bending of thick rectangular laminated composite plates', International Journal of nonlinear mechanics, vol.16, No, 314, (1981), pp. (291- 301).
20. Reddy J.N., "A penalty plate – bending element for the analysis of laminated anisotropic composite plates", International Journal for numerical methods in Engineering, vol. 15, (1980), PP. (1187 – 1206).
21. Reddy J.N., "A refined non – linear theory of plates with transverse Shear deformation", International Journal of solids and structures, vol. 20, No 9 / 10, (1984), PP. (881 – 896).
22. Reissner E.and Starsky Y., 'Bending and stretching of certain types of heterogeneous Aeolotropic plates', Journal of applied Mechanics, vol. 28, (1961), pp. (402 – 408).
23. Rushton K.R., "large deflection of variable thickness plates", International Journal of mechanical sciences, vol. 10, (1968), PP. (723 – 735).

24. Srinivas S. and Rao A.K., "Bending, vibration, and buckling of simply Supported thick orthotropic rectangular plates and laminates" vol.6, (1970), pp. (1463 – 1481).
25. Suleiman, O. M. E. (2017). Deflection of Laminated Composite Plates Using Dynamic Relaxation Method. *International Journal of Physical Sciences and Engineering (IJPSE)*, 1(1), 40-53.
26. Suleiman, O. M. E. (2017). Linear Deflection of Laminated Composite Plates using Dynamic Relaxation Method. *jiA*, 6(2), 1.
27. Taner Timarci, Metin Aydogdu, 'Buckling of symmetric cross-ply square plates with various boundary conditions', *composite structures*, vol. 68,(2005), pp.(381 – 389).
28. Turvey G.J. and Osman M.Y., "Elastic large deflection analysis of Isotropic rectangular Mindlin plates". *International Journal of Mechanical sciences*, vol. 22, (1990), PP. (1 – 14).
29. Turvey G.J. and Osman M.Y., "Large deflection analysis of orthotropic Minding plates", *proceedings of the 12th energy resources technical conference and exhibition*, Houston, Texas, (1989), pp. (163 – 172).
30. Turvey G.J. and Osman M.Y., 'large deflection effects in antisymmetric cross-ply laminated strips and plates', *I.H. Marshall, composite structures*, vol.6, paisley college, Scotland, Elsevier science publishers, (1991), pp. (397 – 413).
31. Vivas, F. E. V., Cuello, R. L. C., Macías, D. M., & Rosado, G. P. (2017). Elaboration of Essential Oil from the Oregano for Medicinal Use Sheet. *International Journal of Physical Sciences and Engineering (IJPSE)*, 1(1), 81-87.
32. Vuksanovic Dj, 'linear analysis of laminated composite plates using single layer higher order discrete models', *composite structures*, vol.48, (2000), pp. (205-211).
33. Vuksanovic Dj, 'linear analysis of laminated composite plates using single layer higher order discrete models', *composite science and technology*, (1998), pp. (377 – 382).
34. Wang J., Liew K.M., Tan M.J., and Rajendran S., 'Analysis of *International Journal of mechanical sciences*', vol. 44, (2002), pp. (1275 – 1293).
35. Ying-Qing Huang, Shengli Di, Chang Chun Wu, and Hiya Sun, 'Bending analysis of composite laminated plates using a partially hybrid stress element with interlaminar continuity', *computer and structures*, vol. 80, (2002), pp. (403 – 410).
36. Zenkour A.M. and Fares M.E. "Non – homogeneous response of cross – ply laminated elastic plates using a higher order theory", *composite Structures*, vol. 44, (1999) pp. (297 – 305).

Biography of Author



Osama Mohammed Elmardi Suleiman was born in Atbara, Sudan in 1966. He received his diploma degree in mechanical engineering from Mechanical Engineering College, Atbara, Sudan in 1990. He also received a bachelor degree in mechanical engineering from Sudan University of Science and Technology – Faculty of Engineering in 1998, and a master degree in solid mechanics from Nile Valley University (Atbara, Sudan) in 2003. He contributed in teaching some subjects in other universities such as Red Sea University (Port Sudan, Sudan),

*Suleiman, O. M. E. (2017). Linear deflection of laminated composite plates using dynamic relaxation method. International Journal of Physical Sciences and Engineering, 1(1), 54-67.
<https://doi.org/10.21744/ijpse.v1i1.11>*