



Deflection of Laminated Composite Plates Using Dynamic Relaxation Method



Osama Mohammed Elmardi Suleiman ^a

Article history: Received 10 January 2017; Accepted in revised form 12 February 2017; Approved 14 February 2017; Available online 15 February 2017

Correspondence Author ^a

Abstract



Keywords

*Deflection program;
Deflection;
Dynamic relaxation
method;
Laminated composite
plates;
Orthotropic shear;*

First - order orthotropic shear deformation equations for the nonlinearly elastic bending response of rectangular plates are introduced. Their solution using a computer program based on finite differences implementation of the Dynamic Relaxation (DR) method is outlined. The convergence and accuracy of the DR solutions for elastic large deflection response of isotropic, orthotropic, and laminated plates are established by comparison with various exact and approximate solutions. The present Dynamic Relaxation method (DR) coupled with finite differences method shows a fairly good agreement with other analytical and numerical methods used in the verification scheme. It was found that: The convergence and accuracy of the DR solution are dependent on several factors including boundary conditions, mesh size, and type, fictitious densities, damping coefficients, time increment and applied load. Also, the DR large deflection program using uniform finite differences meshes can be employed in the analysis of different thicknesses for isotropic, orthotropic, or laminated plates under uniform loads. All the comparison results for simply supported (SS4) edge conditions showed that deflection is almost dependent on the direction of the applied load or the arrangement of the layers.

e-ISSN : 2550-6943, p-ISSN : 2550-6951 © Copyright 2017. The Author. SS Journals Published by Universidad Técnica de Manabí.

*This is an open-access article under the CC BY-SA 4.0 license
(<https://creativecommons.org/licenses/by-sa/4.0/>)*

All rights reserved.

^a Nile Valley University, Atbara, Sudan, *Email address* : osamm64@gmail.com, osamm64@hotmail.com

Contents

Abstract	40
Introduction	42
Methods and Analysis	43
Large Deflection Theory	43
Equilibrium Theory	43
Strain Equations	43
The Constitutive Equations	44
Boundary Conditions	44
Dynamic Relaxation of the Plate Equations	44
Verification of the Numerical Technique	46
Conclusion	51
Acknowledgements	51
References	52
Biography of Authors	53

ملخص

في هذا البحث تم استخدام معادلات تشوهات القص ذات الرتبة الأولى المتباينة الخواص في اتجاهين متعامدين (FSDT). يتم تأطير حل هذه المعادلات باستخدام برنامج حاسوب مؤسس على تطبيق الفروقات المحددة بالازدواج مع أسلوب الإسترخاء الديناميكي (DR). يتم تأسيس تقارب ودقة حلول الإسترخاء الديناميكي (DR) للوح ذات انحرافات كبيرة مرنة متشابهة الخواص، متباينة الخواص في اتجاهين متعامدين، وألواح شرائحية ذات عدة طبقات بمقارنة النتائج بعدة حلول مضبوطة وتقريبية. يظهر أسلوب الإسترخاء الديناميكي (DR) المقترن بأسلوب الفروقات المحددة توافقاً مقبولاً مع أساليب تحليلية وعددية متباينة. وجد في هذه الدراسة أن تقارب ودقة حل أسلوب الإسترخاء الديناميكي يعتمد على عدة عوامل تشمل الشروط الحدية، التقسيمات الشبكية للوح في اتجاهين متعامدين ونوعها، الكثافات الوهمية، معاملات الإخماد، الزيادة الزمنية والحمل المسلط. أيضاً يمكن استخدام برنامج الإسترخاء الديناميكي (DR) في تحليل ألواح متشابهة الخواص، ومتباينة الخواص في اتجاهين متعامدين، وألواح ذات عدة طبقات تحت أحمال منتظمة لثخانات متباينة. أوضحت جميع نتائج المقارنة لحالة الإسناد البسيط الطرفي أن الإنحراف يعتمد أساسياً على اتجاه الحمل المسلط أو ترتيبية الطبقات.

Notation

a, b plate side lengths in x and y directions respectively.

A_{ij} ($i, j = 1, 2, 6$) Plate in plane stiffness.

A_{44}, A_{55} Plate transverse shear stiffness.

D_{ij} ($i, j = 1, 2, 6$) Plate flexural stiffness.

$\varepsilon_x^\circ, \varepsilon_y^\circ, \varepsilon_{xy}^\circ$ Mid - plane direct and shear strains

$\varepsilon_{xz}^\circ, \varepsilon_{yz}^\circ$ Mid - plane transverse shear strains.

E_1, E_2, G_{12} In - plane elastic longitudinal, transverse and shear moduli.

G_{13}, G_{23} Transverse shear moduli in the x - z and y - z planes respectively.

M_x, M_y, M_{xy} Stress couples.

$\bar{M}_x, \bar{M}_y, \bar{M}_{xy}$ Dimensionless stress couples.

N_x, N_y, N_{xy} Stress resultants.

$\bar{N}_x, \bar{N}_y, \bar{N}_{xy}$ Dimensionless stress resultants.

\bar{q} Dimensionless transverse pressure.

Suleiman, O. M. E. (2017). Deflection of laminated composite plates using dynamic relaxation method. *International Journal of Physical Sciences and Engineering*, 1(1), 40-53.
<https://doi.org/10.21744/ijpse.v1i1.5>

Q_x, Q_y Transverse shear resultants.

u, v In – plane displacements.

w Deflections

\bar{w} Dimensionless deflection

x, y, z Cartesian co – ordinates.

δt Time increment

ϕ, ψ Rotations of the normal to the plate mid – plane

ν_{xy} Poisson's ratio

$\ell_u, \ell_v, \ell_w, \ell_\phi, \ell_\psi$ In plane, out of plane and rotational fictitious densities.

$\chi_x^\circ, \chi_y^\circ, \chi_{xz}^\circ$ Curvature and twist components of plate mid – plane

Introduction

Composites were first considered as structural materials a little more than half a century ago. From that time to now, they have received increasing attention in all aspects of material science, manufacturing technology, and theoretical analysis.

The term composite could mean almost any thing if taken at face value, since all materials are composites of dissimilar subunits if examined at close enough details. But in modern engineering materials, the term usually refers to a matrix material that is reinforced with fibers. For instance, the term “FRP” which refers to Fiber Reinforced plastic, usually indicates a thermosetting polyester matrix containing glass fibers, and this particular composite has the lion's share of today commercial market.

In the present work, a numerical method known as Dynamic Relaxation (DR) coupled with finite differences is used. The DR method was first proposed in 1960s and then passed through a series of studies to verify its validity by Turvey and Osman Refs. [4], [8] and [9] and Rushton [2], Cassel and Hobbs [10], and Day [11]. In this method, the equations of equilibrium are converted to dynamic equations by adding damping and inertia terms. These are then expressed in finite difference form and the solution is obtained through iterations. The optimum damping coefficient and time increment used to stabilize the solution depend on a number of factors including the matrix properties of the structure, the applied load, the boundary conditions and the size of the mesh used.

Numerical techniques other than the DR include finite element method, which widely used in the present studies i.e. of Damodar R. Ambur et al [12], Ying Qing Huang et al [13], Onsy L. Roufaeil et al [14]... etc. In a comparison between the DR and the finite element method, Aalami [15] found that the computer time required for finite element method is eight times greater than for DR analysis, whereas the storage capacity for finite element analysis is ten times or more than that for DR analysis. This fact is supported by putcha and Reddy [16] who noted that some of the finite element formulations require large storage capacity and computer time. Hence, due to less computations and computer time involved in the present study. The DR method is considered more efficient than the finite element method. In another comparison Aalami [15] found that the difference in accuracy between one version of finite element and another may reach a value of 10% or more, whereas a comparison between one version of finite element method and DR showed a difference of more than 15%. Therefore, the DR method can be considered of acceptable accuracy. The only apparent limitation of DR method is that it can only be applied to limited geometries. However, this limitation is irrelevant to rectangular plates which are widely used in engineering applications.

The Dynamic Relaxation (DR) program used in this paper is designed for the analysis of rectangular plates irrespective of material, geometry, edge conditions. The functions of the program are to read the file data; compute the stiffness of the laminate, the fictitious densities, the velocities and displacements and the mid – plane deflections and stresses; check the stability of

the numerical computations, the convergence of the solution, and the wrong convergence; compute through – thickness stresses in direction of plate axes; and transform through – thickness stresses in the lamina principal axes.

The convergence of the DR solution is checked at the end of each iteration by comparing the velocities over the plate domain with a predetermined value which ranges between 10^{-9} for small deflections and 10^{-6} for large deflections. When all velocities are smaller than a predetermined value, the solution is deemed converged and consequently the iterative procedure is terminated. Sometimes DR solution converges to an invalid solution. To check for that the profile of the variable is compared with an expected profile over the domain. For example, when the value of the function on the boundaries is zero, and it is expected to increase from edge to center, then the solution should follow a similar profile. When the computed profile is different from the expected values, the solution is considered incorrect and can hardly be made to converge to the correct value by altering the damping coefficients and time increment. Therefore, the boundary conditions should be examined and corrected if they are improper.

The errors inherent in the DR technique include the discretization error which is due to the replacement of a continuous function with a discrete function, and there is an additional error because the discrete equations are not solved exactly due to the variations of the velocities from the edge of the plate to the center. Finer meshes reduce the discretization error, but increase the round – off error due to the large number of calculations involved.

Methods and Analysis

Large Deflection Theory

The equilibrium, strain, constitutive equations and boundary conditions are introduced below without derivation

Equilibrium Theory

$$\begin{aligned}\frac{\partial N_x}{\partial x} + \frac{\partial N_{xy}}{\partial y} &= 0 \\ \frac{\partial N_{xy}}{\partial x} + \frac{\partial N_y}{\partial y} &= 0 \\ N_x \frac{\partial^2 w}{\partial x^2} + 2N_{xy} \frac{\partial^2 w}{\partial x \partial y} + N_y \frac{\partial^2 w}{\partial y^2} + \frac{\partial Q_x}{\partial x} + \frac{\partial Q_y}{\partial y} + q &= 0 \quad (1) \\ \frac{\partial M_x}{\partial x} + \frac{\partial M_{xy}}{\partial y} - Q_x &= 0 \\ \frac{\partial M_{xy}}{\partial x} + \frac{\partial M_y}{\partial y} - Q_y &= 0\end{aligned}$$

Strain Equations

The large deflection strains of the mid – plane of the plate are as given below:

$$\varepsilon_x^\circ = \frac{\partial u^\circ}{\partial x} + \frac{1}{2} \left(\frac{\partial w}{\partial x} \right)^2 + z \frac{\partial \phi}{\partial x}$$

$$\begin{aligned}
\varepsilon_y^\circ &= \frac{\partial v^\circ}{\partial y} + \frac{1}{2} \left(\frac{\partial w}{\partial y} \right)^2 + z \frac{\partial \psi}{\partial y} \\
\varepsilon_{xy}^\circ &= \frac{\partial u^\circ}{\partial y} + \frac{\partial v^\circ}{\partial x} + \frac{\partial w}{\partial x} - \frac{\partial w}{\partial y} + z \left(\frac{\partial \phi}{\partial y} + \frac{\partial \psi}{\partial x} \right) \\
\varepsilon_{xz}^\circ &= \frac{\partial w}{\partial y} + \psi \\
\varepsilon_{yz}^\circ &= \frac{\partial w}{\partial x} + \phi
\end{aligned} \tag{2}$$

The Constitutive Equations

The laminate constitutive equations can be represented in the following form:

$$\begin{aligned}
\begin{Bmatrix} N_i \\ M_i \end{Bmatrix} &= \begin{bmatrix} A_{ij} & B_{ij} \\ B_{ij} & D_{ij} \end{bmatrix} \begin{Bmatrix} \varepsilon_j^\circ \\ \chi_j^\circ \end{Bmatrix} \\
\begin{Bmatrix} Q_y \\ Q_x \end{Bmatrix} &= \begin{bmatrix} A_{44} & A_{45} \\ A_{45} & A_{55} \end{bmatrix} \begin{Bmatrix} \varepsilon_{yz}^\circ \\ \varepsilon_{xz}^\circ \end{Bmatrix}
\end{aligned} \tag{3}$$

Where N_i denotes N_x , N_y and N_{xy} and M_i denotes M_x , M_y and M_{xy} . A_{ij} , B_{ij} and D_{ij} ($i, j = 1, 2, 6$) are respectively the membrane rigidities, coupling rigidities and flexural rigidities of the plate. χ_j° Denotes $\frac{\partial \phi}{\partial x}$, $\frac{\partial \psi}{\partial y}$ and $\frac{\partial \phi}{\partial y} + \frac{\partial \psi}{\partial x}$. A_{44} , A_{45} and A_{55} denote the stiffness

Coefficients and are calculated as follows:-

$$A_{ij} = \sum_{k=1}^n k_i k_j \int_{z_k}^{z_{k+1}} c_{ij} dz, (i, j = 4, 5)$$

Where C_{ij} the stiffness of a lamina is referred to the plate principal axes, and k_i , k_j are the shear correction factors.

Boundary Conditions

Four sets of simply supported boundary conditions are used in this paper, and are denoted as SS1, SS2, SS3, and SS4 as has been shown in Fig. (1) Below.

Dynamic Relaxation of the Plate Equations

An exact solution of the plate equations is obtained using finite differences coupled with dynamic relaxation method. The damping and inertia terms are added to equations (1). Then the following approximations are introduced for the velocity and acceleration terms:

$$\frac{\partial \alpha}{\partial t} = \frac{1}{2} \left[\frac{\partial \alpha^a}{\partial t} + \frac{\partial \alpha^b}{\partial t} \right] \tag{4}$$

$$\frac{\partial^2 \alpha}{\partial t^2} = \left(\frac{\partial \alpha^a}{\partial t} - \frac{\partial \alpha^b}{\partial t} \right) / \partial t$$

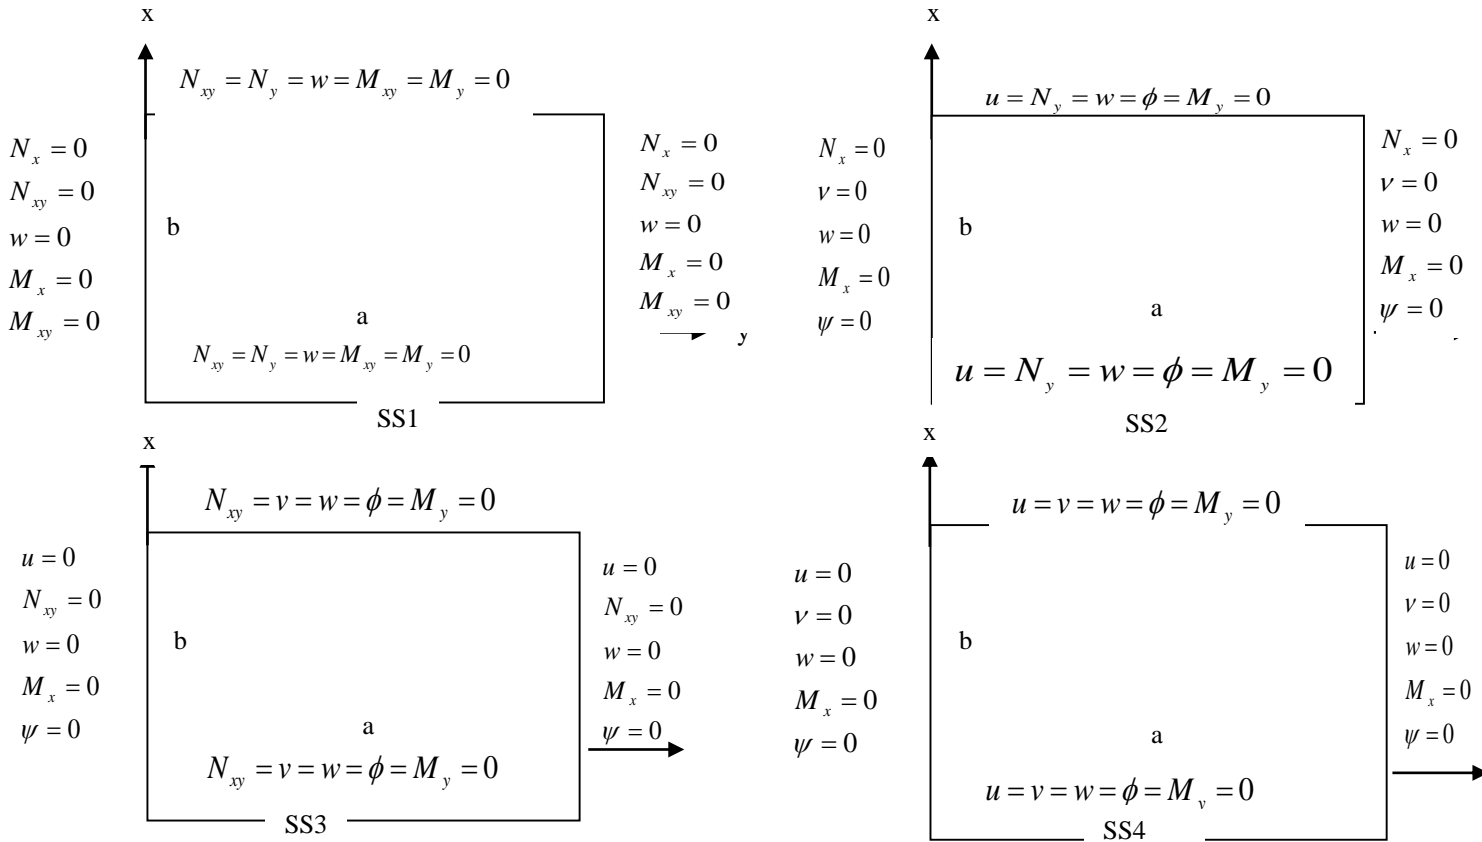


Fig. (1) Simply supported boundary conditions

$$\frac{\partial \alpha}{\partial t} = \frac{1}{2} \left[\frac{\partial \alpha^a}{\partial t} + \frac{\partial \alpha^b}{\partial t} \right] \tag{4}$$

$$\frac{\partial^2 \alpha}{\partial t^2} = \left(\frac{\partial \alpha^a}{\partial t} - \frac{\partial \alpha^b}{\partial t} \right) / \partial t$$

In which $\alpha \equiv u, v, w, \phi, \psi$. Hence equations (1) become:

$$\begin{aligned}
\frac{\partial u^a}{\partial t} &= \frac{1}{1+k_u^*} \left[(1-k_u^*) \frac{\partial u^b}{\partial t} + \frac{\delta t}{\ell_u} \left(\frac{\partial N_x}{\partial x} + \frac{\partial N_{xy}}{\partial y} \right) \right] \\
\frac{\partial v^a}{\partial t} &= \frac{1}{1+k_v^*} \left[(1-k_v^*) \frac{\partial v^b}{\partial t} + \frac{\delta t}{\ell_v} \left(\frac{\partial N_{xy}}{\partial x} + \frac{\partial N_y}{\partial y} \right) \right] \\
\frac{\partial w^a}{\partial t} &= \frac{1}{1+k_w^*} \left[(1-k_w^*) \frac{\partial w^b}{\partial t} + \frac{\delta t}{\ell_w} \left(N_x \frac{\partial^2 w}{\partial x^2} + 2N_{xy} \frac{\partial^2 w}{\partial x \partial y} + N_y \frac{\partial^2 w}{\partial y^2} + \frac{\partial Q_x}{\partial x} + \frac{\partial Q_y}{\partial y} + q \right) \right] \quad (5) \\
\frac{\partial \phi^a}{\partial t} &= \frac{1}{1+k_\phi^*} \left[(1-k_\phi^*) \frac{\partial \phi^b}{\partial t} + \frac{\delta t}{\ell_\phi} \left(\frac{\partial M_y}{\partial x} + \frac{\partial M_{xy}}{\partial y} - Q_x \right) \right] \\
\frac{\partial \psi^a}{\partial t} &= \frac{1}{1+k_\psi^*} \left[(1-k_\psi^*) \frac{\partial \psi^b}{\partial t} + \frac{\delta t}{\ell_\psi} \left(\frac{\partial N_{xy}}{\partial x} + \frac{\partial M_y}{\partial y} - Q_y \right) \right]
\end{aligned}$$

The superscripts a and b in equations (4) and (5) refer respectively to the values of velocities after and before the time increment δt and $k_\alpha^* = \frac{1}{2} k_\alpha \delta t \ell_\alpha^{-1}$. The displacements at the end of each time increment, δt , are evaluated using the following integration procedure:

$$\alpha^a = \alpha^b + \delta t \frac{\partial \alpha^b}{\partial t} \quad (6)$$

Thus equations (5), (6), (2) and (3) constitute the set of equations for solution. The DR procedure operates as follows:

- (1) Set initial conditions.
- (2) Compute velocities from equations (5).
- (3) Compute displacement from equation (6).
- (4) Apply displacement boundary conditions.
- (5) Compute strains from equations (2).
- (6) Compute stress resultants and stress couples from equations (3).
- (7) Apply stress resultants and stress couples boundary conditions.
- (8) Check if velocities are acceptably small (say 10^{-6}).
- (9) Check if the convergence criterion is satisfied, if it is not repeat the steps from 2 to 8.

It is obvious that this method requires five fictitious densities and a similar number of damping coefficients so as the solution will be converged correctly.

Verification of the Numerical Technique

Table (1) shows deflections, stress resultants and stress couples in simply supported in – plane free (SS2) isotropic plate. The present results have been computed with 6×6 uniform meshes. These results are in a fairly good agreement with those of Aalami et al [1] using finite difference method (i.e. for deflections, the difference ranges between 0.35% at $\bar{q} = 20.8$ and 0 % as the pressure is increased to 97). A similar comparison between the two results is shown in Table (2) for simply supported (SS3) condition. It is apparent that the center deflections, stress couples and stress resultants agree very well. The mid – side stress resultants do not show similar agreement whilst the corner stress resultants show considerable differences. This may be attributed to the type of mesh used in each analysis. A set of thin plate results comparisons presented here with

Rushton [2] who employed the DR method coupled with finite differences. The present results for simply supported (SS4) square plates were computed for two thickness ratios using a 8×8 uniform mesh are listed in table (3). In this instant, the present results differ slightly from those found in Ref. [2]. Another comparison for simply supported (SS4) square isotropic plates subjected to uniformly distributed loads are shown in Tables (4) and (5) respectively for deflection analysis of thin and moderately thick plates. In this comparison, it is noted that, the centre deflection of the present DR analysis, and those of Azizian and Dawe [3] who employed the finite strip method are in fairly good agreement (i.e. with a maximum error not exceeding 0.09%).

A large deflection comparison for orthotropic plates was made with the DR program. The results are compared with DR results of Turvey and Osman [4], Reddy's [5], and Zaghoul et al results [6]. For a thin uniformly loaded square plate made of material I which its properties are stated in Table (6) and with simply supported in - plane free (SS2) edges. The center deflections are presented in Table (7) where DR showed a good agreement with the other three.

A large deflection comparison for laminated plates was made by recomposing sun and chin's results [7] for $[90_4^{\circ} / 0_4^{\circ}]$ using the DR program and material II which its properties are cited in Table (6). The results were obtained for quarter of a plate using a 5×5 square mesh, with shear correction factors $k_4^2 = k_5^2 = 5/6$. The analysis was made for different boundary conditions and the results were shown in Tables (8), and (9) as follows: The present DR deflections of two layer antisymmetric cross - ply simply supported in - plane fixed (SS4) are compared with DR results of Turvey and Osman [8] and with sun and chin's values for a range of loads as shown in Table (4-8). The good agreement found confirms that for simply supported (SS4) edge conditions, the deflection depends on the direction of the applied load or the arrangement of the layers. Table (9) shows a comparison between the present DR, and DR Ref. [8] results, which are approximately identical. The difference between laminates $[0^{\circ} / 90^{\circ}]$ and $[90^{\circ} / 0^{\circ}]$ at $b/a = 5$ is 0.3% whilst it is 0% when $b/a = 1$.

The comparison made between DR and alternative techniques show a good agreement and hence the present DR large deflection program using uniform finite difference meshes can be employed with confidence in the analysis of moderately thick and thin flat isotropic, orthotropic or laminated plates under uniform loads. The program can be used with the same confidence to generate small deflection results.

Table (1) comparison of present DR, Aalami and Chapman's [1] large deflection results for simply supported (SS2) square isotropic plate subjected to uniform pressure
($h/a = 0.02, \nu = 0.3$)

\bar{q}	S	\bar{w}_c	$\bar{M}_x(1)$ $\bar{M}_y(2)$	$\bar{N}_x(1)$ $\bar{N}_y(2)$
20.8	1	0.7360	0.7357	0.7852
	2	0.7386	0.7454	0.8278
41.6	1	1.1477	1.0742	1.8436
	2	1.1507	1.0779	1.9597
63.7	1	1.4467	1.2845	2.8461
	2	1.4499	1.2746	3.0403
97.0	1	1.7800	1.4915	4.1688
	2	1.7800	1.4575	4.4322

S (1): present DR results (6×6 uniform mesh over quarter of the plate)

S (2): Ref. [1] results (6×6 graded mesh over quarter of the plate)

Suleiman, O. M. E. (2017). Deflection of laminated composite plates using dynamic relaxation method. *International Journal of Physical Sciences and Engineering*, 1(1), 40-53.
<https://doi.org/10.21744/ijpse.v1i1.5>

$$(1) x = y = \frac{1}{2} a, z = 0$$

Table (2) Comparison of present DR, Aalami and Chapman's [1] large deflection results for simply supported (SS3) square isotropic plate subjected to uniform pressure ($h/a = 0.02, \nu = 0.3$)

\bar{q}	S	\bar{w}_c	$\bar{M}_x(1)$	$\bar{N}_x(1)$	$\bar{N}_x(2)$	$\bar{N}_x(3)$	$\bar{N}_x(4)$
			$\bar{M}_y(1)$	$\bar{N}_y(1)$	$\bar{N}_y(3)$	$\bar{N}_y(2)$	$\bar{N}_y(4)$
20.8	1	0.5994	0.6077	1.0775	0.2423	1.1411	0.1648
	2	0.6094	0.6234	1.0714	0.2097	1.1172	0.2225
41.6	1	0.8613	0.8418	2.2435	0.5405	2.4122	0.3177
	2	0.8783	0.8562	2.2711	0.4808	2.4084	0.4551
63.7	1	1.0434	0.9930	3.3151	0.8393	3.6014	0.4380
	2	1.0572	1.0114	3.3700	0.7564	3.6172	0.6538
97.0	1	1.2411	1.1489	4.7267	1.2604	5.1874	0.5706
	2	1.2454	1.1454	4.8626	1.1538	2.2747	0.9075

S (1): present DR results (6×6 uniform mesh over quarter of the plate)

S (2): Ref. [1] results (6×6 graded mesh over quarter of the plate)

$$(1) x = y = \frac{1}{2} a, z = 0; (2) x = \frac{1}{2} a, y = z = 0; (3) x = 0, y = \frac{1}{2} a, z = 0; (4) x = y = z = 0$$

Table (3) Comparison of present DR, and Rushton's [2] large deflection results for simply supported (SS4) square isotropic plate subjected to uniform pressure ($\nu = 0.3$)

\bar{q}	S	\bar{w}_c	$\bar{\sigma}_1(1)$
8.2	1	0.3172	2.3063
	2	0.3176	2.3136
	3	0.2910	2.0900
29.3	1	0.7252	5.9556
	2	0.7249	5.9580
	3	0.7310	6.2500
91.6	1	1.2147	11.3180
	2	1.2147	11.3249
	3	1.2200	11.4300
293.0	1	1.8754	20.749
	2	1.8755	20.752
	3	1.8700	20.820

S (1): present DR results ($h/a = 0.02; 8 \times 8$ uniform mesh over quarter of the plate)

S (2): present DR results ($h/a = 0.01; 8 \times 8$ uniform mesh over quarter of the plate)

S (3): Ref. [2] results (thin plate 8×8 uniform mesh over quarter of the plate)

$$(1) x = y = \frac{1}{2} a, z = \frac{1}{2} h$$

Table (4) Comparison of the present DR, and Azizian and Dawe's [3] large deflection results for thin shear deformable simply supported (SS4) square isotropic plate subjected to uniform pressure ($h/a = 0.01, \nu = 0.3$)

\bar{q}	S	\bar{w}_c
9.2	1	0.34693
	2	0.34677
36.6	1	0.80838
	2	0.81539
146.5	1	1.45232
	2	1.46250
586.1	1	2.38616
	2	2.38820

S (1): present DR results (6×6 uniform mesh over quarter of the plate)

S (2): Azizian and Dawe [3] results.

Table (5) Comparison of the present DR, and Azizian and Dawe's [3] large deflection results for moderately thick shear deformable simply supported (SS4) square isotropic plates subjected to uniform pressure ($h/a = 0.05, \nu = 0.3$)

\bar{q}	S	\bar{w}_c
0.92	1	0.04106
	2	0.04105
4.6	1	0.19493
	2	0.19503
6.9	1	0.27718
	2	0.27760
9.2	1	0.34850
	2	0.34938

S (1): present DR results (6×6 uniform mesh over quarter of the plate)

S (2): Azizian and Dawe [3] results.

Table (6) Material properties used in the orthotropic and laminated plate comparison analysis

Material	E_1 / E_2	G_2 / E_2	G_{13} / E_2	G_{23} / E_2	ν_{12}	$SCF (k_4^2 = k_5^2)$
I	2.345	0.289	0.289	0.289	0.32	5/6
II	14.3	0.5	0.5	0.5	0.3	5/6

Table (7) Comparison of present DR, DR results of Ref. [4], finite element results Ref. [5] and experimental results Ref. [6] for a uniformly loaded simply supported (SS2) square orthotropic plate made of material I ($h/a = 0.0115$)

\bar{q}	$\bar{w}_c(1)$	$\bar{w}_c(2)$	$\bar{w}_c(3)$	$\bar{w}_c(4)$
17.9	0.5859	0.5858	0.58	0.58
53.6	1.2710	1.2710	1.30	1.34
71.5	1.4977	1.4977	1.56	1.59
89.3	1.6862	1.6862	1.74	1.74

S (1): present DR results (5×5 uniform non - interlacing mesh over quarter of the plate).

S (2): DR results of Ref. [4].

S (3): Reddy's finite element results [5].

S (4): Zaghoul's and Kennedy's Ref. [6] experimental results as read from graph.

Table (8) Deflection of the center of a two - layer anti symmetric cross ply simply supported in - plane fixed (SS4) strip under uniform pressure ($b/a = 5, h/a = 0.01$)

\bar{q}	S	$\bar{w}_1[0^\circ / 90^\circ]$	$\bar{w}_2[90^\circ / 0^\circ]$	$\bar{w}_o (B_{ij} = 0)$	% (1)	% (2)	% (3)
18	1	0.6851	0.2516	0.2961	131.4	- 15.0	172.3
	2	0.6824	0.2544		130.5	- 14.1	168.2
	3	0.6800	0.2600				
36	1	0.8587	0.3772	0.4565	88.1	- 17.4	127.7
	2	0.8561	0.3822		87.5	- 16.3	124.0
	3	0.8400	0.3900				
72	1	1.0453	0.5387	0.6491	61.0	- 17.0	94.0
	2	1.0443	0.5472		60.9	- 15.7	90.8
	3	1.0400	0.5500				
108	1	1.1671	0.6520	0.7781	50.0	- 16.2	79.0
	2	1.1675	0.6630		50.0	- 14.8	76.1
	3	1.1500	0.6600				

S (1): present DR results

S (2): DR results Ref. [8].

S (3): Values determined from sun and chin's results Ref. [7].

(1): $100 \times (\bar{w}_1 - \bar{w}_o) / \bar{w}_o$

(2): $100 \times (\bar{w}_2 - \bar{w}_o) / \bar{w}_o$

(3): $100 \times (\bar{w}_1 - \bar{w}_2) / \bar{w}_2$

Table (9) Center deflection of two - layer anti - symmetric cross - ply simply supported in - plane free (SS1) plate under uniform pressure and with different aspect ratios ($h/a = 0.01; \bar{q} = 18$).

b/a	S	$\bar{w}_1[0^\circ / 90^\circ]$	$\bar{w}_2[90^\circ / 0^\circ]$	$\bar{w}_o (B_{ij} = 0)$	% (1)	% (2)	% (3)
2.5	1	0.8325	0.8422	0.3907	113.1	115.6	- 1.15
	2	0.8328	0.8424	0.3907	113.2	115.6	- 1.1
2.0	1	0.7707	0.7796	0.3807	102.4	104.8	- 1.14

	2	0.7712	0.7799	0.3807	102.6	104.9	- 1.1
1.75	1	0.7173	0.7248	0.3640	97.0	99.1	- 1.0
	2	0.7169	0.7251	0.3640	97.0	99.2	- 1.1
1.5	1	0.6407	0.6460	0.3335	92.1	93.7	- 0.82
	2	0.6407	0.6455	0.3325	92.7	94.1	- 0.70
1.25	1	0.5324	0.5346	0.2781	91.4	92.2	- 0.4
	2	0.5325	0.5347	0.2782	91.4	92.2	- 0.4
1.0	1	0.3797	0.3797	0.1946	95.1	95.1	0.0
	2	0.3796	0.3796	0.1949	94.8	94.8	0.0

S (1): present DR results

S (2): DR results Ref. [8].

$$(1): 100 \times (\bar{w}_1 - \bar{w}_o) / \bar{w}_o$$

$$(2): 100 \times (\bar{w}_2 - \bar{w}_o) / \bar{w}_o$$

$$(3): 100 \times (\bar{w}_1 - \bar{w}_2) / \bar{w}_2$$

Conclusion

A Dynamic relaxation (DR) program based on finite differences has been developed for large deflection analysis of rectangular laminated plates using first order shear deformation theory (FSDT). The displacements are assumed linear through the thickness of the plate. A series of new results for uniformly loaded thin, moderately thick, and thick plates with simply supported edges have been presented. Finally a series of numerical comparisons have been undertaken to demonstrate the accuracy of the DR program. These comparisons show the following:-

1. The convergence of the DR solution depends on several factors including boundary conditions, meshes size, fictitious densities and applied load.
2. The DR large deflection program using uniform finite differences meshes can be employed with confidence in the analysis of moderately thick and flat isotropic, orthotropic or laminated plates under uniform loads.
3. The DR program can be used with the same confidence to generate small deflection results.
4. The time increment is a very important factor for speeding convergence and controlling numerical computations. When the increment is too small, the convergence becomes tediously slow; and when it is too large, the solution becomes unstable. The proper time increment in the present study is taken as 0.8 for all boundary conditions.
5. The optimum damping coefficient is that which produces critical motion. When the damping coefficients are large, the motion is over – damped and the convergence becomes very slow. At the other hand when the coefficients are small, the motion is under – damped and can cause numerical instability. Therefore, the damping coefficients must be selected carefully to eliminate under – damping and over – damping.

Acknowledgement

My deep and sincere gratitude were presented to God for having granted me the ability and the opportunity to complete this paper. I would also like to thank my former lecturers and my friends for their support, their patience, their contribution, and their valuable input, therefore, this article could be completed. I would also thank Maria as advisor as well as editor in chief of SS who has reviewed and approved this study to be published.

References

1. Aalami, B. and Chapman J.C. "large deflection behavior of rectangular orthotropic plates under transverse and in - plane loads", proceedings of the institution of civil Engineers, (1969), 42, pp. (347 - 382).
2. Aalami B., 'Large deflection of elastic plates under patch loading', Journal of structural division, ASCE, vol. 98, No. ST 11, (1972), pp. (2567 - 2586).
3. Arauz, W. M. S., Cedeño, G. I., Chávez, S. S., Pérez, A. V., & Gámez, M. R. (2017). Microgrid With a 3.4 kWp Photovoltaic System in the Universidad Técnica de Manabí. International Journal of Physical Sciences and Engineering (IJPSE), 1(2), 11-20.
4. Azizian Z. G. and Dawe D.J., "Geometrically Non - linear analysis of rectangular Mindlin plates using the finite strip method", computers and structures, vol.22, No.3, (1985), pp. (523 - 436).
5. Cassel A.C. and Hobbs R.E., 'Numerical Stability of dynamic relaxation analysis of nonlinear structures',
6. Castillo, G. A. L., Álava, L. A. C., Fernández, M. C., & Llanes, M. V. (2017). Roadmap for the Introduction of Smart Grids in Ecuador. International Journal of Physical Sciences and Engineering (IJPSE), 1(2), 1-10.
7. Damodar R. Ambur, Navin Jounky, Mark Hilburger, Carlos G. Davila,' Progressive failure analysis of compression loaded composite Curved panels with and without Cutouts,' composite structures, vol.65, (2004), pp. (143 - 155).
8. Day A.S., 'An Introduction to dynamic relaxation', the engineer, vol. 219, No. 5668, (1965), pp. (218 - 221).
9. Jain, P., Billaiya, R., & Malaiya, S. (2017). A Correlational Analysis of Academic Stress in Adolescents in Respect of Socio-Economic Status. International Journal of Physical Sciences and Engineering (IJPSE), 1(1), 68-71.
10. Mohammed Elmardi Suleiman Khayal, O. (2017). Deflection of Laminated Composite Plates Using Dynamic Relaxation Method.
11. Ogunsiji, A. S., & Ladanu, W. K. (2017). A Theoretical Study of Performance Measures in the Strategic and Corporate Entrepreneurships of Firms. International Journal of Physical Sciences and Engineering (IJPSE), 1(1), 72-80.
12. Omer, A. M. (2017). Sustainable Development and Environmentally Friendly Energy Systems. International Journal of Physical Sciences and Engineering (IJPSE), 1(1), 1-39.
13. Onsy L. Roufaeil, Thanh Tran - Cong,' finite strip elements for laminated composite plates with transverse shear strain discontinuities', composite structure, vol. 56, (2002) , pp. (249 - 258).
14. Putcha N.S. and Reddy J.N., 'A refined mixed shear flexible finite element for the non - linear analysis of laminated plates,' computers and structures, vol. 22, No. 4, (1986), pp. (529 - 538).
15. Reddy J.N., 'Energy and variation methods in applied mechanics', John Wiley and sons, New York, (1984), pp. (379 - 387).
16. Rushton K. R., "large deflection of variable - thickness plates", International journal of mech. Sciences, vol. 10, (1968), pp. (723 - 735).
17. Suleiman, O. M. E. (2017). Deflection of Laminated Composite Plates Using Dynamic Relaxation Method. International Journal of Physical Sciences and Engineering (IJPSE), 1(1), 40-53.
18. Suleiman, O. M. E. (2017). Linear Deflection of Laminated Composite Plates using Dynamic Relaxation Method. *jiA*, 6(2), 1.
19. Sun C.T. and Chin H., "on large deflection effects in unsymmetrical cross - ply composite laminates", Journal of composite materials, vol.22 (1988), pp. (1045 - 1059).

20. Turvey G. J. and Osman M. Y., 'Elastic large deflection analysis of isotropic rectangular Mindlin plates', International journal of mechanical sciences, vol. 22, (1990). pp. (1 – 14).
21. Turvey G.J. and Oman M.y., "large deflection effects in anti symmetric cross – ply laminated strips and plates", I.H. Marshall, composite strictures, vol.6, paisley college, Scotland, Elsevier science publishers, (1991), pp. (397 – 413).
22. Turvey G.J. and Osman M.Y., " large deflection analysis of orthotropic Mindlin plates, proceedings of the 12th Energy resources technical conference and exhibition, Houston, Texas (1989), pp.(163 – 172).
23. Vivas, F. E. V., Cuello, R. L. C., Macías, D. M., & Rosado, G. P. (2017). Elaboration of Essential Oil from the Oregano for Medicinal Use Sheet. International Journal of Physical Sciences and Engineering (IJPSE), 1(1), 81-87.
24. Ying Qing Huang, Shenglin Di, Chang Chun Wu, and Huiya Sun, 'Bending analysis of composite laminated plates using a partially hybrid stress element with interlaminar continuity', computer and structures, vol.80, (2002), pp. (403 – 410).
25. Zaghoul S.A. and Kennedy J.B., "Nonlinear behavior of symmetrically laminated plates", Journal of applied mechanics, vol.42, (1975), pp. (234 – 236).

Biography of Author



Osama Mohammed Elmardi was born in Atbara, Sudan in 1966. He received his diploma degree in mechanical engineering from Mechanical Engineering College, Atbara, Sudan in 1990. He also received a bachelor degree in mechanical engineering from Sudan University of science and technology – Faculty of engineering in 1998, and a master degree in solid mechanics from Nile valley university (Atbara, Sudan) in 2003. He contributed in teaching some subjects in other universities such as Red Sea University (Port Sudan, Sudan), Kordofan University (Obayed, Sudan), Sudan University of Science and Technology (Khartoum, Sudan) and Blue Nile university (Damazin, Sudan). In addition he supervised more than hundred and fifty under graduate studies in diploma and B.Sc. levels and about fifteen master theses. He is currently an assistant professor in department of mechanical engineering, Faculty of Engineering and Technology, Nile Valley University. His research interest and favourite subjects include structural mechanics, applied mechanics, control engineering and instrumentation, computer aided design, design of mechanical elements, fluid mechanics and dynamics, heat and mass transfer and hydraulic machinery. He works also as a consultant and a technical manager of Al – Kamali workshops group in Atbara – Sudan old and new industrial areas.

Suleiman, O. M. E. (2017). Deflection of laminated composite plates using dynamic relaxation method. International Journal of Physical Sciences and Engineering, 1(1), 40-53. <https://doi.org/10.21744/ijpse.v1i1.5>